
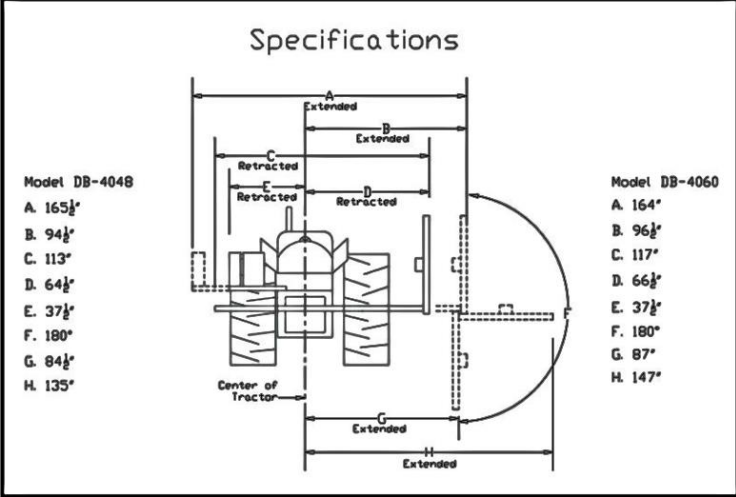


DITCH BANK MOWER DB4048 & DB4060

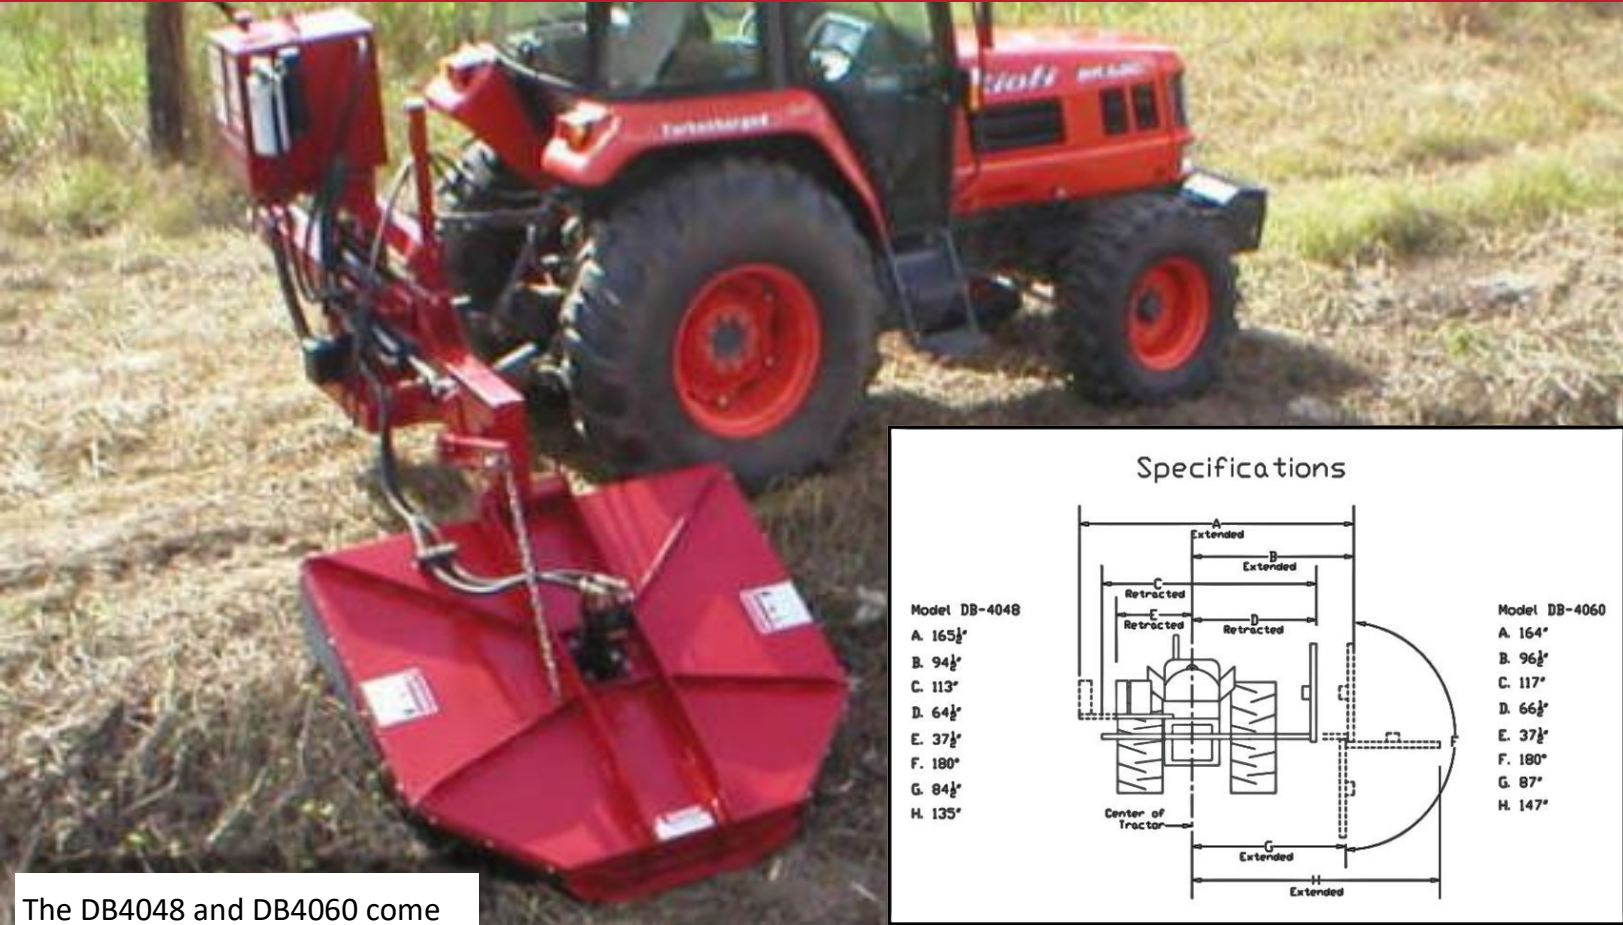

The DB4048 and DB4060 come equipped with round blade carriers and rubber shielding (front and rear). They require dual hydraulic remotes on the tractor. Operator has complete control from the driver's seat. Machines come complete with 35 gallons of hydraulic oil and are completely assembled and ready to use. "Touch and Go" is available as an option for tractors without dual remotes. These are ideal for trimming low overhanging tree limbs, ditches and banks. Counter balance adjusts automatically as cutter head is moved. Mower head moves in, out, up & down and has reversible blade rotation.

SPECIFICATIONS		
	DB4048	DB4060
CUTTING WIDTH	48"	60"
OIL TANK CAPACITY	35 Gallons	
NET WEIGHT	1,670lbs	1,900lbs
REACH (CENTER TRACTOR TO OUTSIDE CUTTER DECK)	11' 3" max.	12' 3" max.
WIDTH FOR TRAILER	9' 5" min.	9' 9" min.
TRACTOR PTO <i>(Dependent on pump choice)</i>	540 -1,000RPM	
TRACTOR WEIGHT	5,000lb Min. 2WD-Cab	5,300lb Min. 2WD-Cab
BLADE TIP SPEED	540 – 15,210FPM & 1,000 – 15,320FPM	540 – 16,096FPM & 1,000 – 16,210FPM
DECK THICKNESS	10 Gauge	

OPTIONS
<u>PUMPS</u>
540 PTO RPM
1,000 PTO RPM
<u>DRIVESHAFTS</u>
540 PTO Driveshaft
1,000 PTO Driveshaft (1-3/8)
1,000 PTO Cat. 5 Driveshaft (1-3/4)
<u>GUARDS</u>
Front & Rear Chain Guards
<u>HYDRUALICS</u>
Hose Kit from mower to tractor
"Touch and Go" valve and hose kit (for tractors WITHOUT dual remotes)